



data**Link**

Petri dish labeling solution


All your data on the edge of the Petri dish

inter**science**

How does dataLink work?

With easySpiral

Use the all-automatic dataLink solution, no need to set parameters.

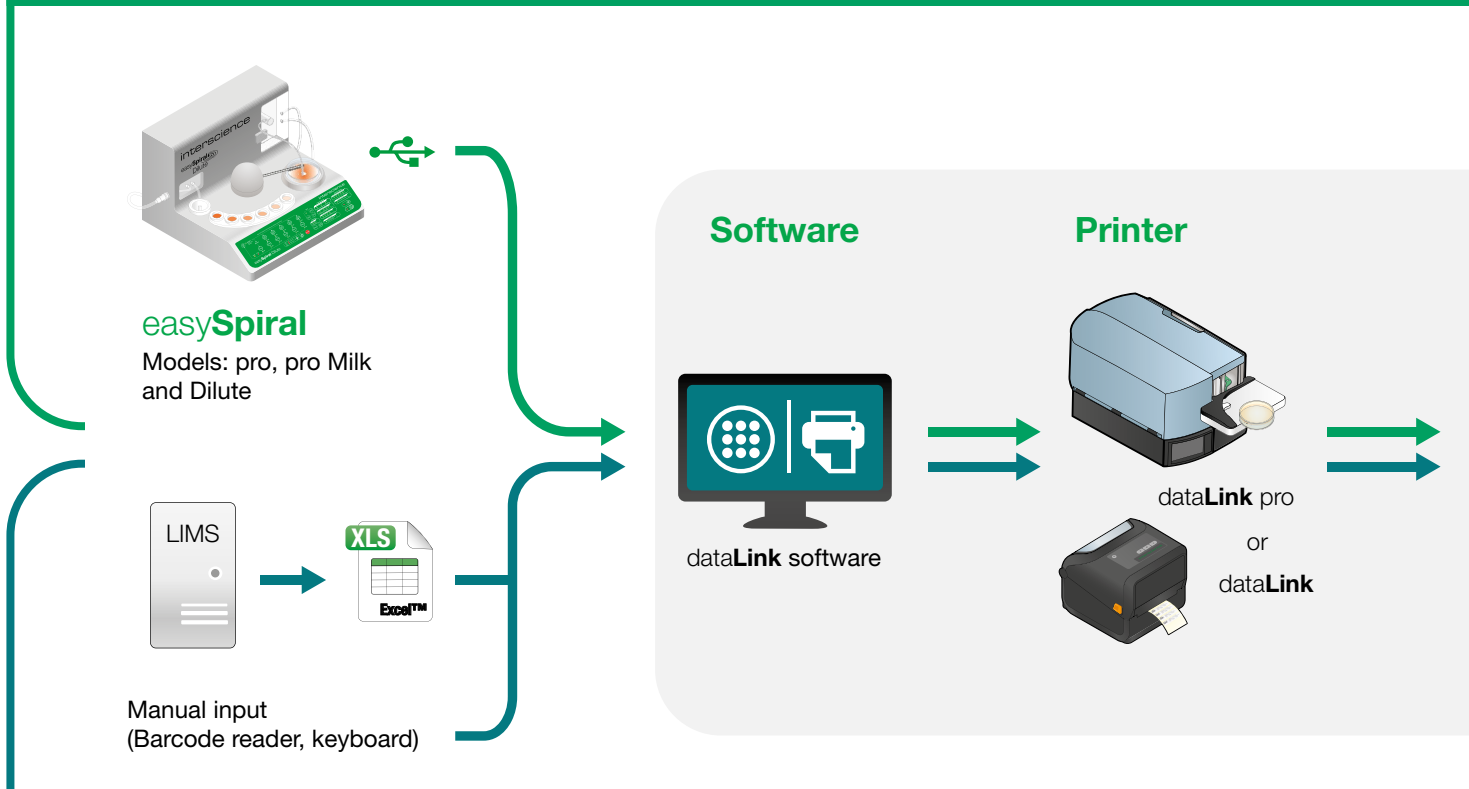

Without easySpiral

Create customized labels with your information.

2 label models


dataLink

The essential

- Manual labeling
- Label dimensions: 50 x 10 mm



dataLink label with easySpiral



Example of a dataLink label without easySpiral




Why label on the edge of the Petri dish?

? By labelling on the slice rather than on the lid, traceability is guaranteed even in the event of mishandling. Manual or automatic counting is also facilitated.

Automated, efficient

Connected to the easySpiral plater, the dataLink software automatically receives the Petri dish identification parameters. These are then encoded and edited on a label stuck to the dish. When the code is read, the information is sent to a Scan counter or ScanStation. Incubation and colony counting settings are automated.

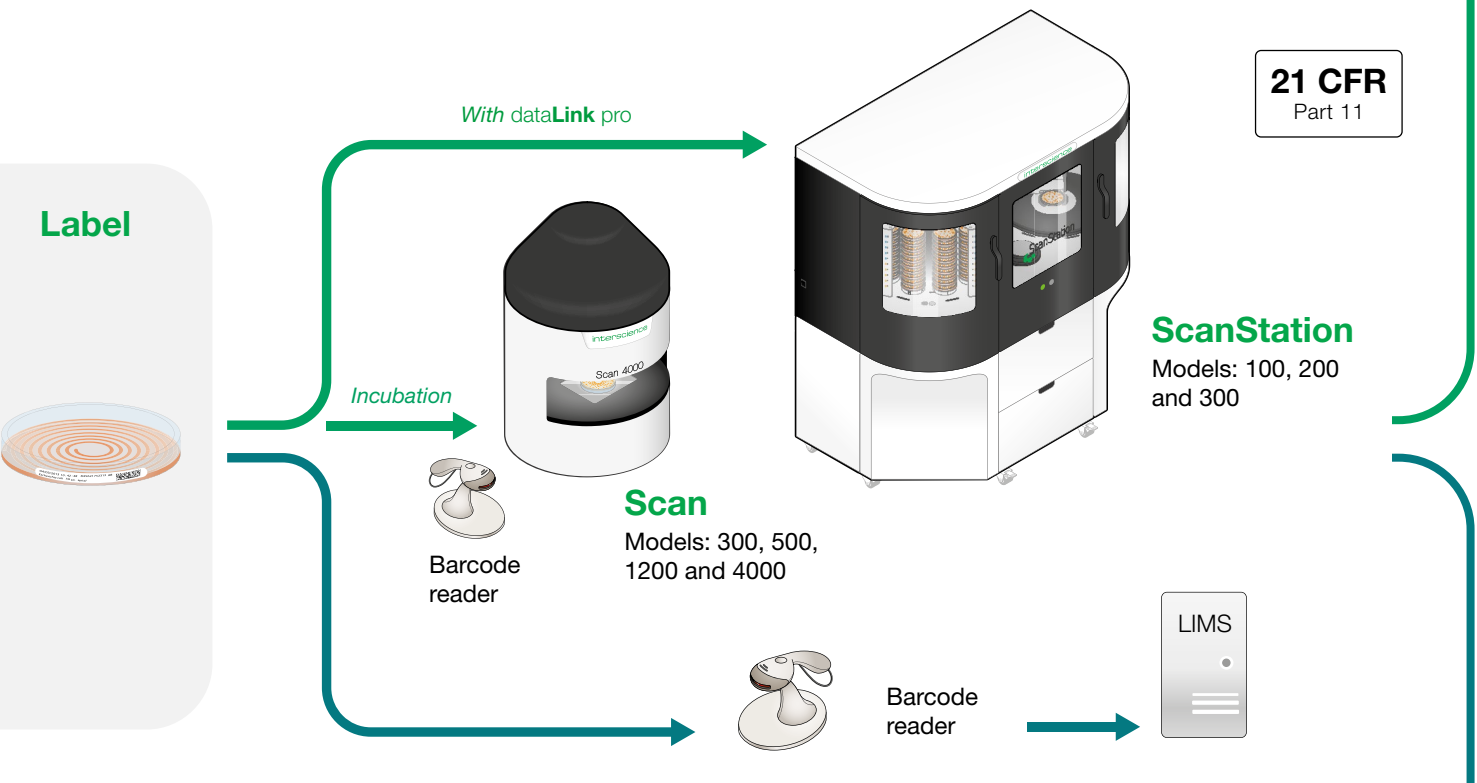

Flexibility and customization

The dataLink software compiles analytical data, obtained by importing a file. You can set parameters for your labels by selecting the data to be integrated. The data can be exported to a LIMS. dataLink can be integrated into any work environment.

◆ Total count Sample145 

24 symbols to identify



Text custom data on 1 or 2 lines

73 characters max, variable depending on characters

Bar-code

Datamatrix
QR Code
Code 39, 128

dataLink pro

The premium choice

- Semi-automatic labeling tray
- Label dimensions: 50 x 5 mm
- Extra-low label for ScanStation



dataLink pro label with easySpiral

30/10/2023 11:54:14 S145 ITS
Total count 100µL 1e-1 exp



Example of a dataLink pro label without easySpiral

◆ Flore totale Echantillon145



Technical specifications and accessories



OVERVIEW		
Sample identification and traceability	✓	✓
Automation of counting settings	✓	✓
Import of raw data	✓	✓
Customized labeling	✓	✓
Semi-automatic labeling tray	-	✓
Extra-low label for ScanStation	-	✓
SPECIFICATIONS		
Type of labeling	Manual	Semi-Automated
Number of labels applied per minute	Manual	20
Connection	USB	USB
USB	1 USB 2.0 port	1 USB 2.0 port
Warranty	1 year	
In compliance with	21 CFR Part 11	
SOFTWARE		
Data types	Volume, dilution, hour, plating mode, user	
Data formats	Input: alphanumeric Output: alphanumeric, barcode, datamatrix	
Data Import/Export	Automatic: csv - Manual: txt, xlsx	
Language	English	
User account management	Local or LDAP	
Audit trail	✓	✓
PRINTER		
Printing type	Thermal transfer	
LCD screen	-	✓
Label dimensions	50 x 10 mm	50 x 5 mm
Printing resolution	203 dpi	600 dpi
PC MINIMUM REQUIREMENTS		
Operating system	Windows™ 10 or 11	
Processor	Intel i5, 2,8 GHz, quad Core (or higher)	
RAM	4 GB	
Equipment	4 free USB ports (USB hub compatible)	4 free USB ports (USB hub compatible) and/or 1 RJ45 port
Résolution Écran	1280 x 1024 pixels (or higher)	
WEIGHT AND DIMENSIONS		
Dimensions (w x d x h)	20.2 x 26.4 x 19.6 cm	25.2 x 28.8 x 46 cm
Net weight	2,05 kg	12 kg
Box (w x d x h)	35 x 25 x 28.5 cm	70 x 35 x 40 cm
Gross weight	3.5 kg	16 kg
Pack contents	1 dataLink printer, dataLink software, 1 barcode reader, 1 power cord, 1 USB cable, 2 user manuals, 1 thermal transfer film, 1 chuck, 2 rolls of 2500 adhesive labels	1 dataLink pro printer, dataLink software, 1 power cord, 1 USB cable, 2 user manuals, 1 thermal transfer ribbon, 1 chuck, 4 rolls of 2000 adhesive labels

ACCESSORIES dataLink

Stickers for printer

2 rolls of 2500 labels for thermal printer
Label size: 50 x 10 mm

Ref. 410 120

Film for printer

Thermal transfer film for printer

Ref. 410 130

ACCESSORIES dataLink pro

Petri dish automatic identification kit

Bar-code (1D) and datamatrix (2D) reader with a turntable for automatic identification of Petri dishes with ScanStation

Ref. 439 170

Barcode reader

Barcode reader (1D / 2D)

Ref. 522 000

Film for printer (dataLink pro)

Thermal transfer film for dataLink pro printer

Ref. 439 052

Chuck adapter (Ø 40-76 mm)

Ø 40-76 mm plastic chuck adapter for dataLink pro printer

Ref. 439 053

Stickers for printer (dataLink pro)

4 rolls of 2000 labels for dataLink pro printer - Label size: 5x50mm (chuck Ø 76 mm)

Ref. 439 054

Products made for Interscience by Interlab, an ISO 9001 certified company.



Your local distributor

interscience

PARIS

Phone: +33 (0)1 34 62 62 61 - Email: info@interscience.com

FRANKFURT

Phone: +49 611 7238 7770 - Email: sales.germany@interscience.com

BOSTON

Phone: +1 781 937 0007 - Email: sales.usa@intersciencelab.com

SHANGHAI

Phone: +86 (0)21-64739390 - Email: sales.china@interscience.cn

SINGAPORE

Phone: +65 6977 7232 - Email: sales.asia@interscience.com

TOKYO

Phone: +81 3 6712 9715 - Email: sales.japan@interscience.com